

Engineered to perform

- Welded, multi-chamber frame and sash
- Interlocking sash with heavy-duty weatherstripping
- Metal-reinforced meeting rail
- True-sloping sill
- 3 ¼" frame depth
- Available frame styles: finless, mounting fin
- Wood extension jambs available for 4 ⅞" and 6 ⅞" wall depths

Min and max sizing

WIDTH		HEIGHT	
MIN	MAX	MIN	MAX
15"	17"	28"	84"
17 ¼"	52"	23 ½"	60"
CONTINUOUS HEAD & SILL (CHS) MAX			
Twin (Each Window)	37 ¾"	77"	
Twin (Overall Unit)	75 ½"	77"	
Triple (Each Window)	37 ¾"	77"	
Triple (Overall Unit)	113 ½"	77"	

Available in 1/8" increments. CHS available on XX and XXX configurations. 1555  
Picture Window is not available with CHS.

Energy efficient glass

Optional tempered glass adds additional strength and obscure or rain glass allows light in while protecting privacy.

GLAZING TYPE	U-VALUE	SHGC
Argon and Low-E glass	0.28	0.26
Argon and Low-E glass with grids	0.28	0.23
Argon and Low-E DSB glass	0.28	0.26
Argon and Low-E DSB glass with grids	0.28	0.23
Argon and HP Low-E glass	0.29	0.21
Argon and HP Low-E glass with grids	0.29	0.19
Argon and HP Low-E DSB glass	0.28	0.21
Argon and HP Low-E DSB glass with grids	0.28	0.19

Note: all values based on standard 3/4" dual-pane insulated glass unit unless notes otherwise



V2000 SINGLE-HUNG

See additional product and warranty information online.




Create a customized look

Enhance your home's spaces with a variety finish options and grid configurations.

FINISH OPTIONS

EXTERIOR	INTERIOR
White EXTRUSION	White EXTRUSION
Almond EXTRUSION	Almond EXTRUSION

GRID TYPES

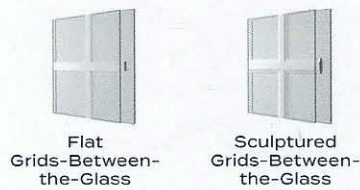



**Rofox Home Service**

Your home is where our heart is.

Windows and Doors

**Replacement Windows**